



Product Name	GAOTek Handheld Gigabit Ethernet
Product SKU	GAOTek-TLT-117
Product URL	https://gaotek.com/product/gaotek-handheld-gigabit-ethernet/



Contents

Features.....	4
Ethernet Test with High Efficiency and High Convenience	5
RFC2544 Test	5
Throughput Test	6
Latency Test.....	6
Frame Loss Test	6
Back To Back Test	7
BERT Test.....	7
Multi-Stream Analysis	7
Y.1564 New Standard for Ethernet Test (Optional).....	8
Network Configuration Test	8
Performance Test	9
TECHNICAL SPECIFICATIONS.....	10
GAOTek Handheld Gigabit Ethernet Ordering Information	16



GAOTek Handheld Gigabit Ethernet



GAOTek Handheld Gigabit Ethernet is designed and manufactured by SeikoFire, which is specialized in one Gigabit Ethernet network deployment and comprehensive test, and compatible with indoor laboratory and outdoor field environment. It can fully meet Ethernet

Based in New York City & Toronto, GAO Tek Inc. is ranked as one of the top 10 global B2B technology suppliers. GAO ships overnight within the U.S. & Canada & provides top-notch support thanks to its 4 decades of experience.



standard, support the latest version of ITU-T; Y.1564; IETF RFC2544; IETF RFC3393; IEEE 802.3; IEEE802.1 standards or recommendations and so on

- Compact and durable, specialized for outdoor field test
- User friendly interface, with high resolution colour touch screen;
- Fast boot up technology;
- High quality, but reasonable price;
- Support comprehensive Ethernet test functions from installation and commission to operation and maintenance.

Features



Based in New York City & Toronto, GAO Tek Inc. is ranked as one of the top 10 global B2B technology suppliers. GAO ships overnight within the U.S. & Canada & provides top-notch support thanks to its 4 decades of experience.




- Support filter and package capture online;
- Support to verify SLA automatically by
 - RFC2544 and Y.1564;
- Support dual-port through function;
- Support SDT (Service disruption test);
- Support 3 layer CoS configuration to verify Metro Ethernet service;
- Support to display test result graphically, easier to view;
- Specialized for One Gigabit Ethernet installation; operation; maintenance; and troubleshooting, or IP service.
- Support full-duplex 10/100/1000 Mbps Ethernet data stream;
- Support RFC2544 (Includes: Throughput, Frame loss, Back-to-back; and Latency);
 - Support Y.1564 (Optional);
 - Support RFC3393;
- Support L1/L2/L3/L4 BERT test;
- Support to generate 8 data streams in maximum (MAC address, VLAN label, MPLS, IPV4/IPV6 address, Payload, and Bandwidth);
 - Support to set flow priority according to
 - CoS and ToS/DSCP;

Ethernet Test with High Efficiency and High Convenience


RFC2544 Test

GAOTek Handheld Gigabit Ethernet Set fully meets RFC2544 standard, supports Throughput; Latency; Frame loss; and Back-to-Back test in metro network, and can be able to generate a complete test report.


Throughput Test

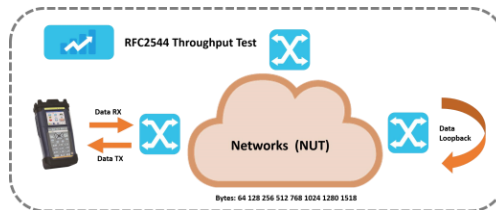


Latency Test

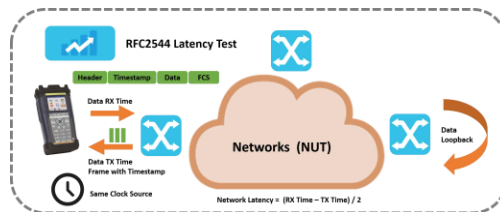


Frame Loss Test

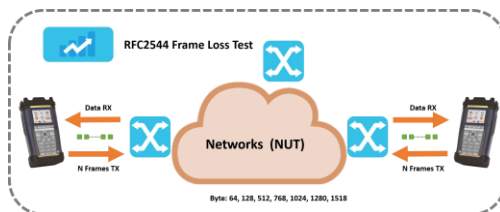

Back To Back Test

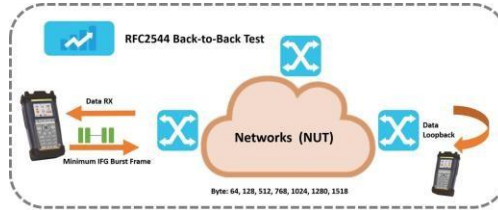


BERT Test

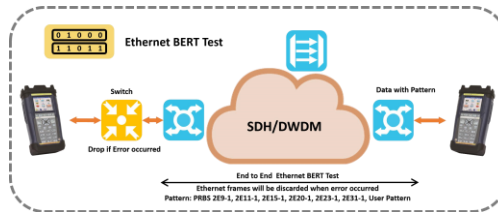

Ethernet BERT test adopts the similar principle of SDH BERT test. It is by transferring the Ethernet frames with special test code, then analyse these frames at the receiver to test the network.

Multi-Stream Analysis

GAOTek Handheld Gigabit Ethernet supports to generate multiple data streams to test the

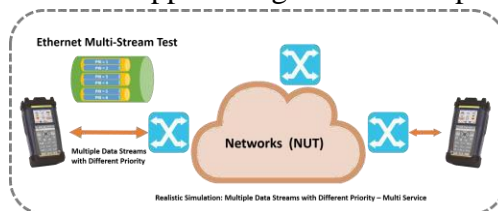

forward ability of these service in Ethernet network. In addition, multiple data streams can be set as different priority.




Ethernet Test with High Efficiency and High Convenience

Y.1564 New Standard for Ethernet Test (Optional)

RFC2544 was the most popular standard for Ethernet test. However, it is specially designed for indoor network facilities test, not suitable for outdoor field test. Hence, ITU-T Y.1564 is particularly introduced for telecom operator to do Ethernet network service launch and fault diagnosis. Compared with RFC2544, it includes critical SLA standards such as packet jitter identification and QoS measurements, which could increase test speed promptly, save test time and resource, and optimizes QoS.

Network Configuration Test

Network configuration test will conduct a test for every service to verify whether the service configuration is correct or not, and whether all specific KPI or SLA parameters have been

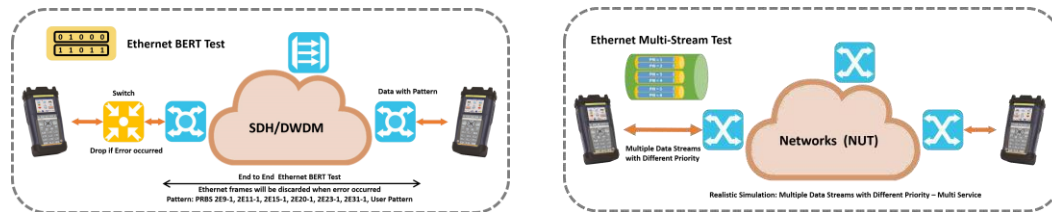

satisfied.

Performance Test

When the configuration of every service has been checked, and verified successfully, S6126 will conduct a test for the quality of service simultaneously.



User Interface	
Screen	3.5 inch TFT touch screen (320×240);
Other Interface	
USB	<ul style="list-style-type: none"> • USB2.0, type A,1; • USB2.0 type B, 1;
Ethernet	10/100M Base-T, RJ45;
Storage	128M;
Physical Specifications	
Size	80(H)x 135 (W) x 250(D) mm;
Weight	1.1kg;
Temperature	<ul style="list-style-type: none"> • Operating: -10°C to 50°C; • Storage: -40°C to 70°C;
Relative Humidity	0% to 95% (non-condensing);



EMC	<ul style="list-style-type: none"> • EN55022/CIPSR22; • EN61000-3-2; • EN55024;
Battery and Power Supply	
Battery	<ul style="list-style-type: none"> • Rechargeable Li-Lon battery; • Working time: 8 hour; • Charging time: <3 hours (typical: 25°C);
Power Supply	<input type="checkbox"/> Input: 100-240V AC, 50-60Hz, 2A; <input type="checkbox"/> Output: 15V DC, 2A.

TECHNICAL SPECIFICATIONS	
Ethernet	
Port	<ul style="list-style-type: none"> • Electrical interface: 2 ports, 10/100/1000M Base-T; • Optical interface: 2 ports, 100/1000M Base-X; <i>User select-able optical module: 850nm, 1310nm, 1550nm.</i>
Ethernet Feature	Auto negotiation, full and half duplex, flow control;
Configuration	Monitor/generate, pass-through;
Encapsulation	Ethernet type II, IEEE802.3 with 802.2, IEEE802.3 with SNAP;
Configuration, Monitoring, and Generation	



Traffic Generation	<ul style="list-style-type: none"> • Variable line rate traffic generation, up to full line rate; • Traffic generate mode: continuous, burst, ramp, n-frame, n-burst, n-ramp; • Adjustable frame size: 38 bytes to 16000 bytes; • Frame size: constant, iMAX, random; • User-defined traffic mix of unicast and broadcast frames; • Fixed or increment MAC/IP identifier; • User programmable DSCP/TOS byte; • Configurable IP and Ethernet source and destination addresses (support IPv4 and IPv6 addressing); • User programmable TCP/UDP address; • Generate pause frames, respond to pause frames; • Answer incoming ARP, Ping requests (ON/OFF);
Stacked VLAN	<ul style="list-style-type: none"> • Up to 3 user-settable VLAN tags; <input type="checkbox"/> Parameters per VLAN tag: <ul style="list-style-type: none"> • Ethernet type II 0x8100 (802.1Q), 0x88a8 (802.1ad), 0x9100, 0x9200, or 0x9300; <input type="checkbox"/> User-defined VLAN ID, CFI, VLAN priority;
Multi stream	Number of streams: up to 8 streams per port can be activated;
Error Injection	FCS, IP check sum error, CRC4 error, bit error;
Alarm generation	No link;
Result, Monitoring and Generation	
Status	<ul style="list-style-type: none"> • Link status, interface type, jabber detected, frames present, MPLS/VLAN, speed, full or half duplex, signal present, bit rate of incoming Ethernet signal, auto negotiation complete; • Link partner abilities: speed/duplex; • Indicators of utilization, throughput, error-ed frames; • Signal level indication for optical Ethernet interfaces;
Performance Statistics	Utilization, throughput, frame rate;
Frame Statistics	<ul style="list-style-type: none"> • Total frames, total testing frames, total not testing frames, uni-cast/multicast/broadcast frames, number of pause frames; • Total VLAN frames; • Total MPLS frames;



	<ul style="list-style-type: none"> • Total error-ed framed, number of oversized, normal, and runt frame, number of FCS error-ed;
--	---

Result, Monitoring and Generation	
Frame Distribution Statistics	<input type="checkbox"/> Total valid/frames, <64, 64-127, 128-511, 512-1023, 1024-1518, >1518;
Multi stream	Display information per steam: <input type="checkbox"/> Frame loss count/rate, throughput, latency, packet jitter, frames and bytes received and transmitted;

Transmit Statistics	Total frames, unicast/multicast/broadcast;
Filter	Filter condition support: <input type="checkbox"/> Source and destination MAC/IP, IPv6, VLAN ID and VLAN Priority, MPLS, IP TOS, TCP/UDP source and destination port, Ethernet type and IP protocol;
BER Test and Service Disruption Test	



BER Test	<ul style="list-style-type: none"> • Generation and detection of test pattern, count of errors in received test pattern; • Pattern generation: layer 1 to layer 4; • Frame loss count and frame loss seconds; • BER measurement results; • Test pattern: PRBS9, PRBS11, PRBS15, PRBS20, PRBS23, PRBS31, CRPRJ, JTPAT, SPAT, 32bits user defined;
Error Injection	FCS, IP check sum error, UDP/TCP check sum error, bit error;
Service Disruption Test	<p>Service disruption test activated as part of BER test:</p> <ul style="list-style-type: none"> • Max/avg service disruption test, resolution: 0.1us; • Number of service disruption;
Loopback and Pass Through	
Loopback Test	<ul style="list-style-type: none"> • Layer 1 to layer4 loopback test; <input type="checkbox"/> Advanced loopback test; • Packet loss setting: percentage, packet count, time; • Loopback drop enable: protocol loss, protocol pass, control, CRC error, IP/TCP/UDP error;
Pass Through Test	<ul style="list-style-type: none"> • Pass through monitoring function between 2× 1GE electrical or 2×1GE optical ports; • Advanced pass through test; • Packet loss setting: percentage, packet count, time; • Pass through drop enable: protocol loss, protocol pass, control, CRC error, IP/TCP/UDP error;
RFC3393	
Jitter Test	<ul style="list-style-type: none"> • G.711, G.723.1, G.729 and so on VoIP packet jitter test; • Jitter result: hits, min, max, current, average;
RFC2544	
RFC2544 Test	<ul style="list-style-type: none"> • Switch/router test and single ended network test mode: • Throughput, frame loss, latency, back-to-back; • End-to-end network test mode (2 units in local-remote setup): • Throughput, frame loss, back-to-back;
Service Activation Test (Y.1564)	
Service Activation Test	<p>ITU-T Y.1564 Service Activation Test:</p> <ul style="list-style-type: none"> • Up to 8 services per port; • Colour-aware and non-colour-aware in combinations;



	<ul style="list-style-type: none"> • Test modes: one-way (uni-or bi-directional, symmetrical, or asymmetrical), round-trip;
Service Activation Test	<input type="checkbox"/> Verification against service acceptance criteria: information rate, frame transfer delay, frame delay variation, frame loss rate, availability;

Service Activation Test (Y.1564)	
Service Configuration Test	<ul style="list-style-type: none"> • Subtest for: CIR, EIR, traffic policing; • Step duration: 1-60s (user define); • Number of steps: 1 to 4; • Result: pass/fail indication, IR (min/avg/max), FL (count/FLR), FTD, FDV (min/avg/max (during measurement));
Service Performance Test	<ul style="list-style-type: none"> • All services tested simultaneously at CIR; • Duration: 15min, 2hours, 24 hours, or user defined; • Result: pass/fail indication, IR (min/avg/max), FL (count/FLR), FTD, FDV (min/avg/max (during measurement));
Remote Smart Loopback Test	
Remote Smart Loopback	<ul style="list-style-type: none"> • Use as local unit control another remote unit for RFC2544 and Y.1564 bi-directional testing; • Support: layer 1 to layer 4 smart loopback test;
Advanced IP Tools	
PING	For connectivity and configuration check: <input type="checkbox"/> Round trip time (RTT); <input type="checkbox"/> Support IPv4, TTL, URL;
Trace Route	Trace IP route over IP network: <input type="checkbox"/> Information per hop: PING time, number of ping timeouts;
VCT Cable Test	Use for CAT5 cable connectivity check: <input type="checkbox"/> Status: pass/fail; <input type="checkbox"/> Channel; <input type="checkbox"/> Fault location; <input type="checkbox"/> Polarity; <input type="checkbox"/> Pair Skew;
Flow Control	Flow control Time, us: <input type="checkbox"/> Pause time: total, last, max, min; <input type="checkbox"/> Pause frame count: TX, RX;



FTP Upload/ Download	Use for FTP server and client emulation: <ul style="list-style-type: none"> • Support IPv4 and URL; <input type="checkbox"/> File upload/download; • Username/password; <input type="checkbox"/> Result: pass/fail indication, upload/download time display;
HTTP	WEB access: <ul style="list-style-type: none"> <input type="checkbox"/> Support IPv4 and URL; <input type="checkbox"/> HTTP access pass/fail;
Advanced PING (Topology)	Advance/fast PING, PING segments of the IP one by one in one time: <ul style="list-style-type: none"> • IP address range: start, end <input type="checkbox"/> Timeout (ms); • Send count; <input type="checkbox"/> Status: pass/fail indication;
MPLS	
Number of MPLS Header	Up to 3 MPLS header set by user;
Parameter per MPLS Header	User defined label, EXP and TLL fields in each MPLS header;
Statistics	MPLS frame count;
Ethernet Frame Capture	
Buffer Size	<input type="checkbox"/> 16Kbytes; <input type="checkbox"/> When capture buffer full: stop;
Capture Data	CAP format for display in Wireshark.



GAOTek Handheld Gigabit Ethernet Ordering Information

S6126 STANDARD CONFIGURAIOTN	
Module	Description
S6126	Handheld Gigabit Ethernet Tester;
	Dual 10/100/1000M Base-T electrical interface;
	Dual 1000M Base-X optical interface;
	Layer 1 to Layer 4 BERT test;
	Up to 8 streams generation and analysis with MAC/VLAN/IP/TCP/UDP;
	RFC2544 standard test with Throughput, Latency, Frame Loss, and Back-to-Back;
	Bi-directional RFC2544 test;
	RFC3393 Jitter test for VoIP packets;
	Layer 1 to Layer 4 loopback and smart loopback test;
	Through mode for Ethernet network monitoring;
	Enable to drop data packet under though and loopback mode;
	Up to 1000M streams generation with 3 Layer VLAN;
	Ping, Trace Route, FTP Download/Upload, and HTTP tools;
	Ethernet service disruption test;
	Packet capture and analysis to 1000M rate;
	Cable test with CAT5 length and fault measurement;
	Bi-directional test;
	Enable to generate frame with random length;
Enable to generate data streams with increment MAC and IP;	
Layer 1 bandwidth statistics;	
Remote control by PC;	
Accessories Code	Accessories Description
16080010	LC/PC to LC/PC full-duplex single-mode fibre, 3 meter, one;
16060040	CAT5 cable, 3 meter, one;
14020090	1.25G 1310nm 15Km LC SFP optical modules, two;
05020050	SFP optical port dust proof cap - black - rubber, two
05020060	RJ45 electrical port dust proof cap - black - rubber, two

Based in New York City & Toronto, GAO Tek Inc. is ranked as one of the top 10 global B2B technology suppliers. GAO ships overnight within the U.S. & Canada & provides top-notch support thanks to its 4 decades of experience.



43170030	S6100 100-240V input and 15V output AC/DC power adapter, one;
18080030	S6100 disc include S6126 user manual and SeikoFire remote control software, one;
20060350	9cm Stylus Pen, one;
19070021	S6200 package, one;
18040011	One year warranty service;
18010010	Factory test report, one;
18010020	Calibration certificate, one.

S6126 OPTIONAL CONFIGURATION	
Optional Software	
OPAP-Y1564AGeEth	Y.1564 standard service configuration and performance test for SLA QoS with CIR/EIR/Traffic Dropped for GE;
OPAP-DPY1564AGeEth <i>(Need to order OPAP-Y1564AGeEth first)</i>	Bi-directional Y.1564 test;
OPAP-IPv6AGeEth	IPv6 feature, the test interface can set IPv6 address and can generate stream with IPv6;
OPAP-ScanAGeEth	Traffic scan according with destination MAC/IP, source MAC/IP, 3 Layer VLAN, 3 Layer MPLS inservice test;
OPAP-EautoAGeEth	Advance auto-negotiation, can set the remote equipment auto-negotiation the speed and duplex as you want;
OAPA-EPINGAGeEth	Advance/Fast PING, PING segments of the IP one by one in one time;
OPAP-3MPLSAGeEth	Up to 1000M streams generation with 3 Layer MPLS label;
OPAP-DPRFC2544AGeEth	Enhancement RFC2544 test, support different upstream and downstream rates setup for Throughput, Frame Loss and Back-to- Back test;
OPAP-FXAGeEth	Dual 100M Base-X optical ports;
Optional Hardware	
43160020	S6100 lithium polymer rechargeable battery;



OPAP-One warranty	One year extended warranty service;
OPAP-Two warranty	Two years extended warranty service;
14020160	1.25G-850nm-550m-MM-LC-SFP-DDM;
14020090	1.25G-1310nm-15km-SM-LC-SFP-DDM;
14020340	1.25G-1550nm-40km-SM-LC-SFP-DDM.

Contact us: sales@gaotek.com